



 www.laizhouxinyue.com.cn

LAIZHOU XINYUE MACHINERY CO., LTD.

XINYUE

MACHINERY



LAIZHOU XINYUE MACHINERY CO., LTD.

Add: Qianchen, Shahe Town, Laizhou Shandong PR.China Postcode: 261427

Tel: 0086-535-2379188 Fax: 0086-535-2377888

E-Mail: zhanyi868@vip.163.com Website: www.laizhouxinyue.com.cn

To be a respected modern enterprise

XINYUE MACHINERY

provide for customers
More optimized solutions



Xinyue Machinery

Laizhou Xinyue Machinery Co., Ltd. was established in 1992. We have more than 200 engineering technicians and skillful workers with hi-tech machining equipment, advanced production process and technology, complete testing measures. OEM service is also available upon your request.

We are specialized in manufacturing paving tools (brick cutters, etc), wood sanding machines and metal sanding machines, the three major series of products. Some of the products have been certified by CE international safety standard and exported to Western Europe, North America, Southeast Asia, more than 30 countries. Besides, we also have certified ISO9001:2008 Quality Management System Certification by TUV Rheinland (China) Ltd.

Our factory covers 11000 square meters, located beside the border of Bohai, 120km away from Qingdao Port, convenient in geographical position and advanced in communication facility.

Our service purpose is "quality first, customer foremost". Welcome all the friends from abroad and domestic to our company for business negotiation and cooperation to realize mutually benefit and common development.

**QUALITY FIRST,
CUSTOMER FOREMOST**

INDUSTRY ADVANTAGE BASE ADVANTAGES



RESEARCH ADVANTAGE BRAND ADVANTAGE TEAM ADVANTAGE

Promote social prosperity and stability

Assist in building a harmonious society

Create a happy working atmosphere for employees

Share enterprise achievements and uphold the spirit of mutual benefit

Share business results with partners

PIPE NOTCHER



Model	MH100
Power supply	400v
Belt	100x2000mm
Roller dimensions	20-76.1mm
Motor	2.5/3.3KW
Motor speeds	1400/2800rpm
Belt speeds	23.5/47 m/s
Grinding options	1 Pipe notcher 2 Belt sander 3 Deburring table
Angles of pipe notcher	30°-90°(0°-60°)
Dust extration	Additional
Standard roller is	42.4mm
Machine size	1250x750x1140mm




Features

- * Compound action swivel vice achieving angles between 30°-90°.
- * Belt sander on the back work table.
- * Deburring support.
- * Easy roller changing system.
- * 1 grinding roller 42.4mm standard, 20-76.1mm available according to order.
- * 1 Zirconium corundum sand belt, corn 40 standard, 100x2000mm.
- * Roller holder (space for 8 rollers)
- * 2 dust collection boxes
- * 1 Allen key to operate/adjust machine



PIPE NOTCHER

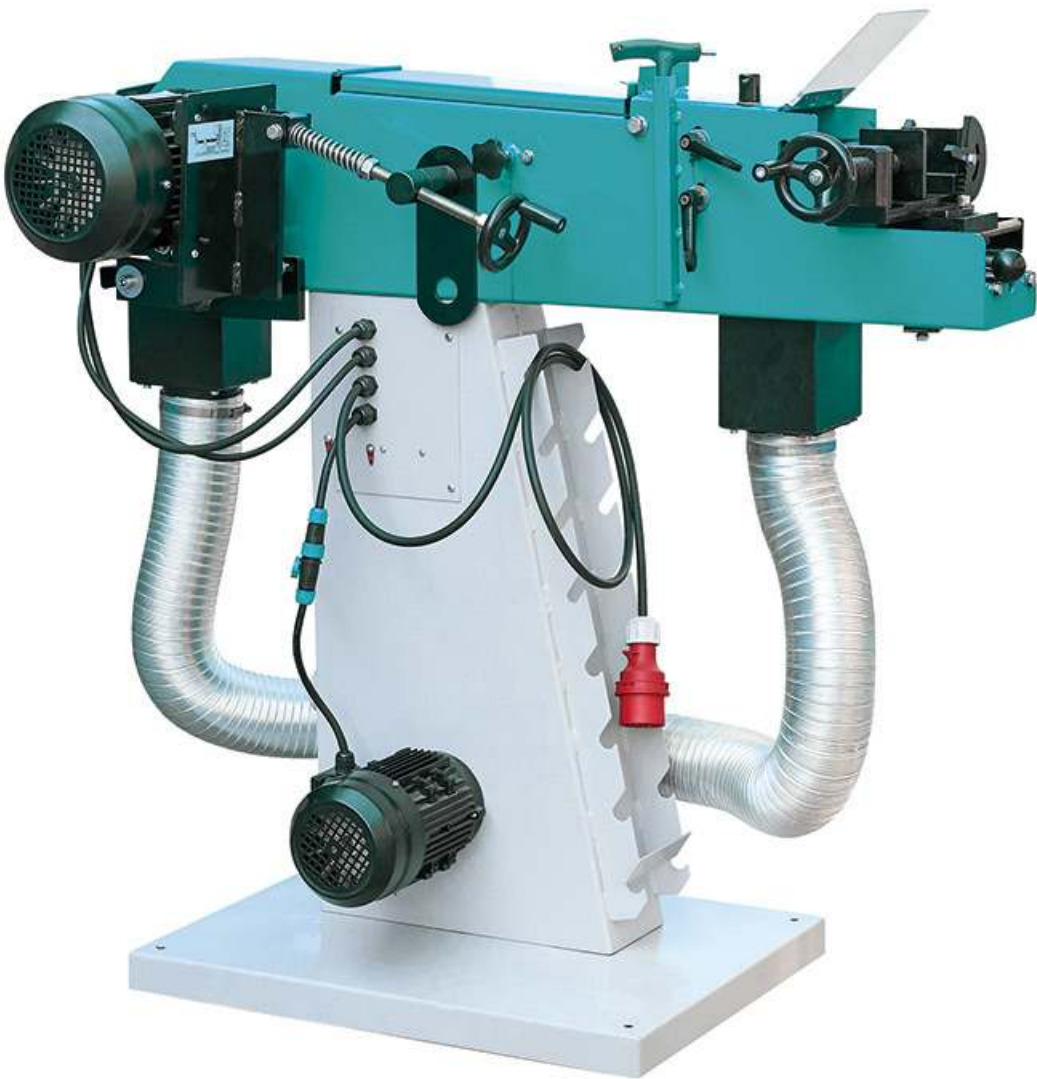

Model	MH100-AS
Power supply	400V
Belt	100*2000mm
Roller dimensions	20-76.1mm
Motor	2.5/3.3kw
Motor speeds	1400/2800 rpm
Belt speeds	23.5/47 m/s
Grinding options	1 Pipe notcher 2 Belt sander 3 Deburring table
Angles of pipe notcher	30°-90° (0°-60°)
Machine size	1340*700*1210mm
Standard roller	42.4mm

PIPE NOTCHER



100% inspection before delivery



Assembly workshop



BELT SANDER BS150 SERIES



- Features:
- * Double speed motor
 - * Rapid belt changing system
 - * Adjustable working height
 - * Vibration free operation
 - * Including dust collection box
 - * 1 grinding belt 150*2000mm
 - * Top table for flat grinding and deburring

Model	BS150-200	BS150-240
Belt size (mm)	150X2000	150X2000
Motor speed (rpm)	2800	2800
for single speed motor (single phase or three phase)		
Belt speed (m/s) for single speed motor	30	36
Motor speed (rpm)	2800/1400	2800/1400
for double speed motor (three phase)		
Belt speed (m/s) for double speed motor	30/15	36/18
Top work table size (mm)	500X150	500X150
Main Wheel size ϕ /W (mm)	200/150	240×150
Motor power KW	2.5/3.3	2.5/3.3
Package zixe (mm)	1150X590X540	1150X590X540
N.W/G.W (KG)	90/114	98/122
Quantity for one 20' container/ 40' container	72/160	72/160



BELT SANDER BS100-140 SERIES



- Features:
- * Double speed motor
 - * Rapid belt changing system
 - * Vibration free operation
 - * Including dust collection box
 - * Top table for flat grinding and deburring



Model	BS100-140-1220	BS100-140-1500
Belt size (mm)	100X1220	100X1500
Motor speed (rpm)	2800	2800
for single speed motor (single phase or three phase)		
Belt speed (m/s) for single speed motor	20	20
Motor speed (rpm)	2800/1400	2800/1400
for double speed motor (three phase)		
Belt speed (m/s) for double speed motor	20m/10m	20m/10m
Top work table size (mm)	290X100	430X100
Main Wheel size ϕ /W (mm)	140×100	140×100
Motor power KW	1/1.5	1/1.5
Package size (mm)	750X490X540	845X490X540
N.W/G.W (KG)	45/60	52/68
Quantity for one 20' container/ 40' container	144/288	120/220



BELT SANDER BS75 SERIES



- Features:
- * Double speed motor
 - * Rapid belt changing system
 - * Adjustable working height
 - * Vibration free operation
 - * Including dust collection box
 - * 1 grinding belt 75*2000mm
 - * Top table for flat grinding and deburring

Model	BS75-200	BS75-240
Belt size (mm)	75X2000	75X2000
Motor speed (rpm)	2800	2800
for single speed motor (single phase or three phase)		
Belt speed (m/s) for single speed motor	30	36
Motor speed (rpm)	2800/1400	2800/1400
for double speed motor (three phase)		
Belt speed (m/s) for double speed motor	30/15	36/18
Top work table size (mm)	500X75	500X75
Main Wheel size ϕ /W (mm)	200/75	240×75
Motor power KW	2.5/3.3	2.5/3.3
Package size (mm)	1150X520X540	1150X520X540
N.W/G.W (KG)	77/100	82/105
Quantity for one 20' container/ 40' container	88/184	88/184

DRUM SANDER



Drum Sander ZS18-A



Drum Sander ZS18-B

Features:

- * Open ended design, can sanding twice
- * Sanding height can be adjustable
- * Can connect dust collector
- * You can choose the sander with a stand or a cabinet, cabinets can store tools

Model	ZS18-A
Roller sandpaper size (mm)	2100x75
Conveyor sandpaper size (mm)	1120x450
Work table size (mm)	460x465
Dust collecting port (mm)	φ62
Roller speed (RPM)	2800(50Hz) 3300(60Hz)
Conveyor speed (m/min)	0 ~ 4
Max workpiece height (mm)	100
Min workpiece height (mm)	5
Max workpiece width (mm)	460
Double max workpiece width (mm)	920
Max grinding feed (mm)	0.5
Roller size (mm)	φ100x465
Motor Power (KW) (220v-240v) 50Hz (110v-120v) 60Hz (380v-415v)50Hz	1.5
Conveying motor power (W)	60
Package size (mm)	880x620x800
G.W/N.W KG	115/130
Packing quantity: 20'/40'/40' high container	42/90/135

Model	ZS18-B
Roller sandpaper size (mm)	2100x75
Conveyor sandpaper size (mm)	1120x450
Work table size (mm)	460x465
Dust collecting port (mm)	φ62
Roller speed (RPM)	2800(50Hz) 3300(60Hz)
Conveyor speed (m/min)	0 ~ 4
Max workpiece height (mm)	100
Min workpiece height (mm)	5
Max workpiece width (mm)	460
Double max workpiece width (mm)	920
Max grinding feed (mm)	0.5
Roller size (mm)	φ100x465
Motor Power (KW) (220v-240v) 50Hz (110v-120v) 60Hz (380v-415v)50Hz	1.5
Conveying motor power (W)	60
Package size (mm)	880x720x800
G.W/N.W KG	134/150
Packing quantity: 20'/40'/40' high container	40/84/126

DRUM SANDER



Metal polishing machine ZS18M

MDC750 Dust collector

Model	Leg type base model	Cabinet style base design
Roller sandpaper size (mm)	2760x75	2760x75
Conveyor sandpaper size (mm)	1120x450	1120x450
Work table size (mm)	460x465	460x465
Dust collecting port (mm)	φ100	φ100
Roller speed (RPM)	2800(50Hz) 3300(60Hz)	2800(50Hz) 3300(60Hz)
Conveyor speed (m/min)	0 ~ 4	0 ~ 4
Max workpiece height (mm)	80	80
Min workpiece height (mm)	5	5
Max workpiece width (mm)	460	460
Max grinding feed (mm)	0.5	0.5
Roller size (mm)	φ120x465	φ120x465
Motor Power (KW) (220v-240v) 50Hz (110v-120v) 60Hz (380v-415v)50Hz	3	3
Conveying motor power (W)	60	60
Package size (mm)	880x620x800	880x720x800
G.W/N.W KG	129/150	148/180
Packing quantity: 20'/40'/40' high container	42/90/135	40/84/126

Model	MDC750
Fan blade size	325mm
Voltage	120V/1P 60Hz 230V/1P 50Hz 400V/3P 50Hz
Motor power	750w
Motor speed	3400rpm 2800rpm 2800rpm
Dust collecting port	2x100mm
Single Air Outlet (withdust bag)	1800CMM
Double Air Outlet (withdust bag)	1100CMM
Air Outlet	100mm
Dust bag size	φ330x500
Machine size	575mmx470mmx1016mm
G.W/N.W	53KG
Package size	630mmx530mmx1160mm
Packing quantity:20'/40'/container	72/152

BELT DISC SANDER

Model	BS-648
Belt size (mm)	150×1220
Disc size (mm)	\
Belt worktable size (mm)	260×150
Disc worktable size (mm)	\
Dust collect port (mm)	φ40
Moror speed (rpm) for 220V 50Hz	2800
Belt speed (m/min) for 220V 50Hz	703
Motor power (KW) (220~240V) 50Hz	1.1
Motor power (KW) (110~120V) 60Hz	1.1
Moror speed (rpm) for 110V 60Hz	3300
Belt speed (m/min) for 110V 60Hz	830
Pack size (mm)	855×715×570
G.W/N.W (KG)	55/72
Pack quantity 20'/40' container	80/164



Belt Sander BS-648

Model	BDS-612-A
Belt size (mm)	150×1220
Disc size (mm)	φ305
Belt worktable size (mm)	260×150
Disc worktable size (mm)	380×260
Dust collect port (mm)	φ40×2
Moror speed (rpm) for 220V 50Hz	2800
Belt speed (m/min) for 220V 50Hz	703
Motor power (KW) (220~240V) 50Hz	1.1
Motor power (KW) (110~120V) 60Hz	1.1
Moror speed (rpm) for 110V 60Hz	3300
Belt speed (m/min) for 110V 60Hz	830
Pack size (mm)	885×760×570
G.W/N.W (KG)	63/81
Pack quantity 20'/40' container	72/156



Belt disc sander BDS-612-A



Belt disc sander BDS-612-B

Features

The belt can be used horizontally or vertically, and both the belt and the disc are equipped with worktables that can be tilted for use. The machine is equipped with double dust collect port, which can be used separately with vacuum cleaner. You can choose the sander with a stand or a cabinet, cabinets can store tools.

Model	BDS-612-B
Belt size (mm)	150×1220
Disc size (mm)	φ305
Belt worktable size (mm)	260×150
Disc worktable size (mm)	380×260
Dust collect port (mm)	φ40×2
Moror speed (rpm) for 220V 50Hz	2800
Belt speed (m/min) for 220V 50Hz	703
Motor power (KW) (220~240V) 50Hz	1.1
Motor power (KW) (110~120V) 60Hz	1.1
Moror speed (rpm) for 110V 60Hz	3300
Belt speed (m/min) for 110V 60Hz	830
Pack size (mm)	885×760×570
G.W/N.W (KG)	73/91
Pack quantity 20'/40' container	72/156



PUSH-TYPE METAL BELT SANDER



Model	BS75P-200	BS150P-200
Motor capacity kW single speed (230V/50Hz)	3.3	3.3
Motor capacity kW single speed(400V/50Hz)	3.3	3.3
Motor capacity kW double speed(400V/50Hz)	2.5/3.3	2.5/3.3
Motor speed(Rpm) single speed	2800	2800
Motor speed(Rpm) double speed	1400/2800	1400/2800
Belt speed(m/s) single speed	30	30
Belt speed(m/s) double speed	15/30	15/30
Main Wheel Size(mm)	75x200	150x200
Belt size(mm)	75X2000	150x2000
Dusting mouth(mm)	1X100	1x100
DimensionsLxWxH(mm)	1000x500x115	1000x500x115
Noise level(dB/A)	80-90	80-90
N.W./G.W.(Kg)	80/105	92/122
Package Size(mm)	1050x750x780	1050x825x780



POLISHING MACHINES



VPM-100X2000A



VPM-200X2000B

ORDER NO.	12-6252	12-6252
MODEL	VPM-200X2000B	VPM-200X2000B
Belt size(mm)	100x2000	200x2000
Top worktable size(mm)	100x350	535x241
Grinding attachment swivel range	0-45°	0-45°
Motor speed(rpm)	2850/1450	1450
Belt speed(m/s)	30/15	19
Motor power(kW)	2.2/1.5	3
Package size(mm)	1550x820x610	1780x700x610
N.W./G.W.(kg)	93/113	120/140

METAL SAW JS5012



Technical parameters of the metal saw JS5012

Model	MBS150FHC-1
	230V~,50Hz,550W 400V,3~,50H7,550W 110V~,60Hz; 220V,3~,60Hz motor available
	1638x12.7x0.64 mm 20, 29, 50 m/min
	60°L~0°-45°R
	25W
	950x460x550mm ³

MBS150FHC-1	0°	45°L	60°L	45°R
	128	95	44	95
	100	90	40	90
	127x150	75x95	44x56	75x95

PORTABLE SAWMILL



- Features:
- * Portable sawmill is used with chain saw for cutting wood.
 - * The sawmill is easy to move and very solid.

Model	S24	S36	S48
Size(in.)	24	36	48
Fit chainsaw bars size(in.)	14 to 24	14 to 36	14 to 48
Log Diameter(in.)	21	33	45
Cut plank Thickness(in.)	0.20 - 11.81	0.20-11.81	0.20-11.81

MACHINE FOR PROFESSIONAL SHARPENING OF BARBER'S TOOLS



- Features:
- * Professional barber tool polishing
 - * Suitable for grinding and polishing all kinds of blades
 - * Magnetically fixed grinding disc, easy to replace
 - * Suitable for all kinds of working condition, easy to carry

Model	KG150
Types of sharpened tools	Household scissors, classic barber's scissors, convex barber's scissors
Methods of sharpening	Rough sharpening, Finishing sharpening, Polishing
Motor power supply voltage (V)	220
Bias lighting power supply voltage (V)	12
Nominal motor power consumption (W) not more than	375
Adjustable frequency of wheel revolution (rpm)	0...2000
Replaceable wheel diameter (mm)	150
Machine dimensions (mm)	380 x 280 x 450
Net weight (kg)	19
Gross weight (kg)	28

CUTTING MACHINE



Model	ZJ350
Blade dimension	350mm
Engine	Electric motor
Power	3kw
Voltage	400V/50Hz
Application	Bricks, tiles, and pavement materials
Color	tangerine
Weight	78kg
Machine size	1200*656*1330mm
Table stroke	515mm

Model	ZJ350
Engine	LONCN LC165F Honda GX160
Power	4.5kW(6.0hp)/4.0kW(5.5hp)
Blade dimension	350mm
Max. Cutting depth	125mm
Max. Cutting Length	450mm
Table Travel	515mm
External dimension	1180x680x1550mm
Packing size	1300x700x930mm
Net Weight:	90kg

EHP600 HYDRAULIC BRICK CUTTING MACHINE



Model	EHP600
Max. Length	600mm
Max. Stress	32T
Thickness	200mm
Oil pump type	RMH-6121-D-1-020-WF
Motor	12V,0.8kw,3200r,S3 Short working hours
Oil pump displacement	0.6cc/r
Working pressure	16Mpa
Control valve	12V-D electromagnetic valve
Tank	2L
Charger	EPA1205
Storage battery	KD38-12 12V 38Ah
Machine size	950*510*870
N.W.	167Kg

EHP4300 HYDRAULIC BRICK CUTTING MACHINE



Model	EHP4300
Max. Length	430mm
Max. Stress	19.5 T
Thickness	120mm
Oil pump type	RMH-6122-D-2-020WF
Motor	12V, 0.8KW,3200r,S3 short working hours
Oil pump displacement	0.6cc/r
Working pressure	20MPa
Control valve	12V-D electromagnetic valve
Tank	1.8L Horizontal tank (135x130x146)
Charger	EPA1205
Storage battery	KD38-12 12V 38Ah
Machine size	895x487x957
N.W.	145kg

BRICK CUTTER SERIES



MC BRICK CUTTER

Model	MC
Max cutting width	115mm
Max cutting thickness	80mm
Most cutting edge	150x82x250mm
Weight	2.23kg



* Collapsible table for ZQ100S

Model	ZQ100s
Range	40-58,62-73mm
Blade	4 side, free floating knife
Most cutting edge	210x100x70mm 210x100x50mm 240x120x71mm
Application	All most used size
Color	RAL 1021 Yellow or customize
Weight	9kg

* Special for brick layer's cutter.

* With special knife for range 35-50mm.



Model	ZQ150
Cutting range(mm)	Length 150 Height 40-90
Blade	Fixed, 4 cutting edges
Spindle	1 spindle
Supporting plates	Fixed
Application	Paving stones
Color	RAL1021 Yellow or customize
Weight	13kg
Machine size	640x350x410mm

* Smallest version in brick cutters range.

* Professional type for cutting small size stones.

* Compact design and low weight.

* Fixed blade can be used four times, ensures a long lifetime.

BRICK CUTTER SERIES



Model	ZQ330
Cutting range(mm)	Length 330 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Springs
Application	Paving stones
Color	RAL1021 Yellow or customize
Weight	41kg
Machine size	1030x285x435mm

* One most used type.

* The compact, solid design provides ergonomical and easy use.

* Fixed blade can be used four times, ensures a long lifetime.

* Change from double handed lifting to single handed lifting.

Model	ZQ330R
Cutting range(mm)	Length 330 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	1 spindle
Supporting plates	Springs
Handle	Optional lengthening bar, 600mm
Application	Paving stones
Color	RAL1021 Yellow or customize
Weight	36kg
Machine size	790x285x530mm

* One spindle type, easy to make the right adjustment for stones.

* Fixed blade can be used four times, ensures a long lifetime.

* Seamless steel pipes make the machine more stronger.



BRICK CUTTER SERIES



Model	ZQ330P
Cutting range(mm)	Length 330 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	1 spindle
Supporting plates	Springs
Application	Paving stones
Color	RAL1021 Yellow or customize
Weight	40kg
Machine size	930x285x580mm

- * One spindle type, easy to make the right adjustment for stones.
- * Fixed blade can be used four times, ensures a long lifetime.




Model	ZQ330W
Cutting range(mm)	Length 330 Height 10-120
Blade	Flexible blade, replaceable
Spindle	2 spindles
Supporting plates	Springs
Handle	Optional lengthening bar, 600mm
Application	Paving stones, Hard-baked paving stones, Natural stones
Color	RAL1021 Yellow or customize
Weight	57kg
Machine size	840x285x435mm

- * Special version of ZQ330 with flexible blade.
- * Flexible cutting teeth adjust themselves to the surface of the block.
- * Much better cut with less effort based on the uniform pressure on the fracture line.
- * Professional for difficult materials such as natural stones or hard-baked clinkers with an irregular surface.



Model	ZQ430R
Cutting range(mm)	Length 430 Height 30-120
Blade	Fixed, 4 cutting edges
Spindle	1 spindle
Supporting plates	Springs
Handle	Optional lengthening bar, 600mm
Application	Paving stones, slabs
Color	RAL1021 Yellow or customize
Weight	43kg
Machine size	915x285x570mm

- * One spindle type, easy to make the right adjustment for stones.
- * Fixed blade can be used four times, ensures a long lifetime.
- * Optional lengthening handle, easy to cut and ergonomic for use.
- * Seamless steel pipes make the machine more stronger.

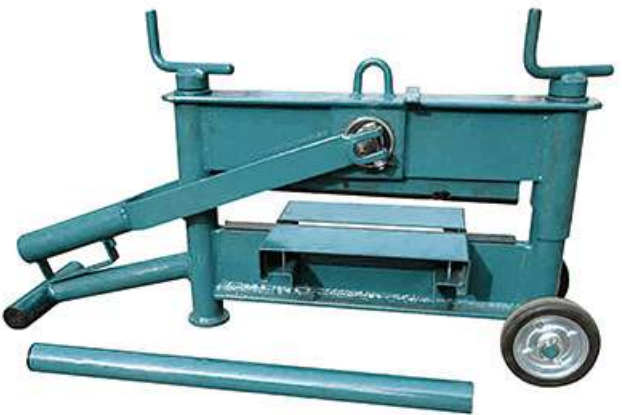

Model	ZQ430L
Cutting range(mm)	Length 430 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Springs
Handle	Optional lengthening bar, 600mm
Application	Paving stones, slabs
Color	RAL5003 Blue or customize
Weight	49kg
Machine size	900x285x435mm

- * Middle size brick cutter.
- * Greater range makes it easy to cut bigger slabs.
- * Optional lengthening handle, easy to cut and ergonomic for use.
- * Fixed blade can be used four times, ensures a long lifetime.



BRICK CUTTER SERIES



Model	ZQ430G
Cutting range(mm)	Length 430 Height 10-300
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Springs
Handle	Optional lengthening bar, 600mm
Application	Sand-lime bricks, slabs, thick blocks, kerbstones.
Color	RAL5003 Blue or customize
Weight	54kg
Machine size	1030x285x630mm

- * A versatile tool for paving stones and sand-lime bricks.
- * Greater height range makes it easy to cut bigger slabs.
- * Optional lengthening handle, easy to cut and ergonomic for use.
- * Fixed blade can be used four times, ensures a long lifetime.



Model	ZQ430P-A
Cutting range(mm)	Length 430 Height 40-155
Blade	Fixed, 4 cutting edges
Spindle	1 spindle
Supporting plates	Springs
Handle	Optional lengthening bar, 1200mm
Application	Paving stones, slabs
Weight	59.5kg
Machine size	1250x285x650mm (with lengthening bar)

- * One spindle type, easy to make the right adjustment for stones.
- * Fixed blade can be used four times, ensures a long lifetime.
- * Special design for Canadian block(thicker block).



Model	ZQ430W-A
Cutting range(mm)	Length 430 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Springs
Handle	Optional lengthening bar, 650mm
Application	Paving stones, Hard-baked
Weight	Paving stones, Marbles
Machine size	75kg 1360x285x450mm (with lengthening bar)

- * Special version of ZQ430W with fixed blade.
- * Much better cut with less effort based on the uniform pressure on the fracture line.
- * Professional for difficult materials such as marbles or hard-baked clinkers with an irregular surface.



Model	ZQ500
Cutting range(mm)	Length 500 Height 120
Blade	Fixed, 4 cutting edges
Spindle	1 spindle
Supporting plates	Fixed
Application	sand-lime block
Color	RAL1021 Yellow or customize
Weight	23kg

- * A lightweight brick cutter.
- * The large cutting width is ideal for a variety of dimensions of sand-lime blocks.

* Collapsible table for ZQ500



BRICK CUTTER SERIES



Model	ZQ530L
Cutting range(mm)	Length 530 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Springs
Handle	Optional lengthening bar, 600mm
Application	Paving stones, large slabs
Color	RAL1021 Yellow or customize
Weight	58kg
Machine size	990x285x435mm

- * Middle size brick cutter.
- * Greater range makes it easy to cut bigger slabs.
- * Optional lengthening handle, easy to cut and ergonomic for use.
- * Fixed blade can be used four times, ensures a long lifetime.

- * A largest cutter in our production range
- * Extremely suitable for cutting large stones and hard-baked stones.
- * Optional lengthening handle, easy to cut and ergonomic for use.
- * Fixed blade can be used four times, ensures a long lifetime.



Model	ZQ650L
Cutting range(mm)	Length 650 Height 10-120
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Fixed
Handle	Optional lengthening bar, 850mm
Application	Paving stones, large slabs, many other types of stones.
Color	RAL1021 Yellow or customize
Weight	76kg
Machine size	1160x320x540mm



BRICK CUTTER SERIES



Model	ZQ650Z
Cutting range(mm)	Length 650 Height 10-400
Blade	Fixed, 4 cutting edges
Spindle	2 spindles
Supporting plates	Fixed, optional roller
Handle	Optional lengthening bar, 900mm
Application	Large slabs, sand-lime block
Color	RAL1021 Yellow or customize
Weight	115kg
Machine size	1300x1010x800mm

- * A special sand-lime elements cutter in our production range.
- * The optional roller is the ideal cutter to cut big sand-lime elements in right size.
- * Reversible handle for horizontal cutting.
- * Legs and holding plates are adjustable and detachable.
- * No fine dust, good for user's health.
- * Fixed blade can be used four times, ensures a long lifetime.



BRICK CUTTER QUALITY INSPECTION



100% inspection before delivery



Assembly workshop

BRICK CUTTER PACKAGE



Steel pallets suitable for FCL container loading



Package

BLOCK LIFTER



Model	BLOCK LIFTER
color	white
Machine size	1680*745*1860mm
Crane arm height	2500mm
Max load	500kg
material	steel pipe
N.W.	104.5kg

PAVING STONE LIFTER

Model	
Width	1100-1000-950-900-850-800-750-700-650-600-550-500mm
Grip depth	40mm
Weight	11kg
Lifting capacity	150kg+Lifting eye



- Feature:**
- * Design for moving concrete kerb stones, gutters and large paving slabs.
 - * Removable handles.
 - * Pin bolts to adjust the opening width.
 - * Durable surface protection by galvanizing.
 - * Useful tool for gardeners,pavers to do road construction, landscaping-design and transport.



Brick Transport Cart

Model	BTC1050
Max. Loading Capacity	450kgs
Max. Pressure	15kp
Max. Height	900mm
Min.-Max. Clamping Width	450-1050mm
N.W.	77kgs

* Special design for gardeners, pavers, road construction, transport

PLATFORM HAND TRUCK



Application


* suitable for gripping and carrying the slab plate, marbles and flag paving stones.

Model	PSL500
Clamp Width	300,400,500mm or other dimension
Max. Loading Weight	100kg
External Dimension	560x550x1400mm
Net Weight	13.5kg



VACUUM SYSTEM

Vacuum Stone Lifter VSL100

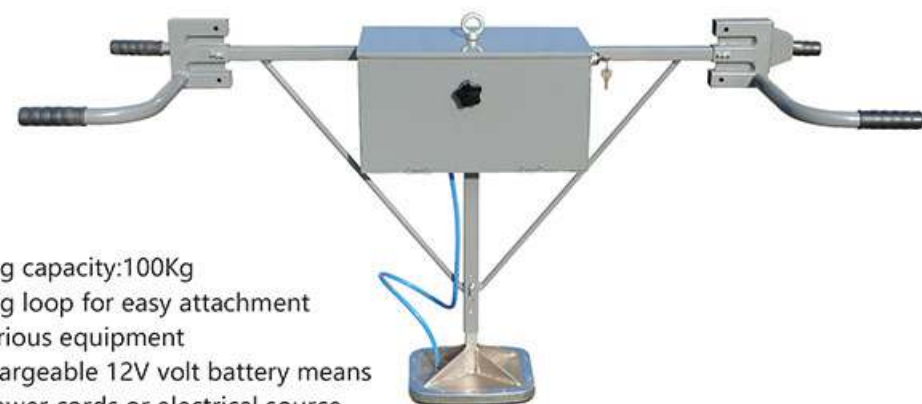

- * Lifting capacity:100Kg
- * Lifting loop for easy attachment to various equipment
- * Rechargeable 12V volt battery means no power cords or electrical source
- * Included suction plate size:260x204mm
- * Perfect choice for installing granite, bluestone or wet cast concrete slabs
- * Adjustable height:750.8mm,776.2mm,801.6mm,827mm
- * Machine size:1530x558x900mm
- * Machine Weight:30Kg



Model	BR70
Most cutting edge	417x285x310mm
Weight	6.53kg

Model	BR160
Most cutting edge	417x377x307mm
Weight	7.33kg

Model	BR220
Most cutting edge	417x437x302mm
Weight	7.93kg

OTHER TOOLS



Model	CJ80
Alignment hammer	
Coating	Color galvanized
Weight	4kg
Machine size	150x80x920mm



Model	CQ35
Block spacer	
Coating	Color galvanized
Weight	2kg
Machine size	360x35x1030mm



Post Puller

Opening Size	5mm
Working Hight	480-900mm
Handle Length	830-1700mm
N.W.	1.5kgs

- * Constructed from high tensile steel for longer and better performance;
- * Gripper bites into post for easy extraction;
- * Long handle provides excellent leverage;
- * Ideal for removing star pickets, steel pipes, posts etc;
- * Optional size according to your requirement.




Hand Earht Auger

Overall Height	1200mm
Blade Diameter	150mm
Blade Length	≈300mm
N.W.	7kgs

- * AUGER TYPE, post hole digger;
- * Customer's designs and logos are welcome;
- * OptionsI size according to your requirement.



BLOCK GRAB SERIES

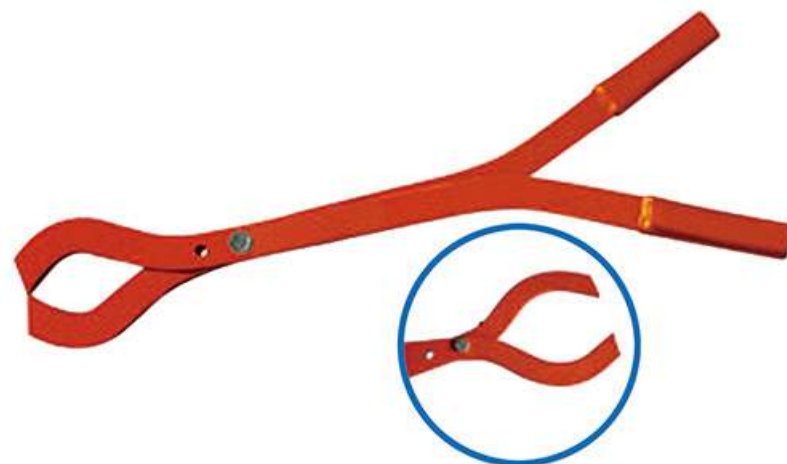

Model	SJ260
Width	150-240mm
Length	900mm
Load capacity	150kg
Points	Hardened


Feature

- * Special design for the hand-transport and placement of kerbstones, edging blocks and natural stone blocks.
- * Replaceable rubber gripping surfaces.



Model	SJ300
Clamp range	200-300mm
Blade	Hardened steel 35x45x5mm
Application	Paving stones, paving tiles, slabs
Coating	Galvanized
Weight	5kg
Machine size	350x100x810mm

- * A convenient brick lifter to lift paving stones and slabs out of the road surface.
- * It can lift the stones easily without destroying other stones around.
- * The blades are easy to replace and guarantee a long usage life.

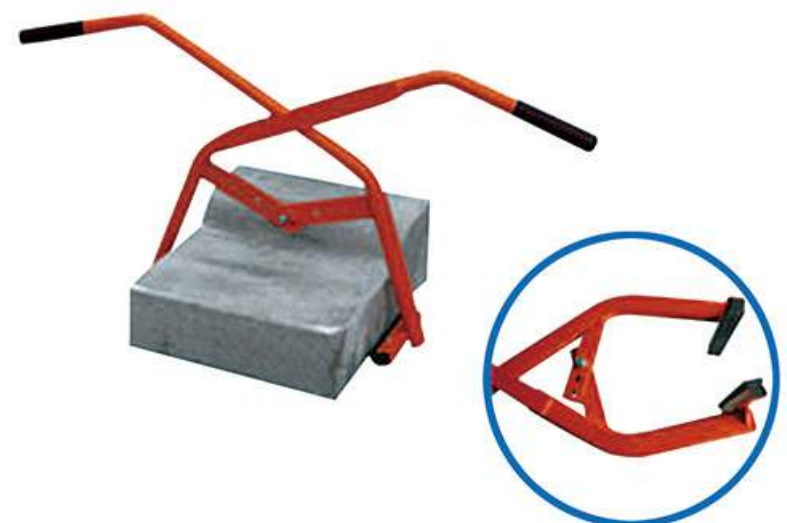

Model	SJ300R
Width	220-300mm
Height	200mm
Load capacity	150kg
Grippers	Rubbers

Feature

- * Special design for the hand-transport and placement of kerbstones, edging blocks and natural stone blocks.
- * Replaceable rubber gripping surfaces.



BRICK CUTTER SERIES



Model	SJ310
Clamp range	160-310mm
Inside height	200mm
Grippers	point screws
Application	Kerbstones
Color	RAL1021 Yellow
Weight	4kg
Machine size	850x120x740mm

- * A convenient brick lifter to lift and carry kerbstones.



Model	SJ350
Jaw Capacity	350mm
Max. Loading Bearing	200kg
External Dimension	600x240x600mm
Net Weight	12kg

Application

- * Scissor action grabs suitable for gripping bricks, curb stones and other heavy stuff.



Model	SJ450
Clamp range	270-450mm
Application	paving stones, bricks
Color	RAL1021 Yellow
Weight	2kg
Machine size	290x550x190mm

- * A convenient brick handle tool for any road worker and brick layer.
- * It can be opened max. 450mm.



BRICK CUTTER SERIES



Model	SJ600
Clamp range	50-600mm
Inside heighe	190mm
Max. lifting weight	600kg
Grippers	300mm, rubber or point screws
Application	bricks, any kind of stones, heavy stuff
Color	RAL1021 Yellow
Weight	35kg
Machine size	680x520x620mm


- * An universal grip for bricks, big stones and any heavy stuff.
- * It can be used with crane.
- * It can be equipped with rubber strips or harden piont screws for different stuff.



Model	SJ1100H
Width	1100-1000-950-900-850-800-750-700-650-600-550-500mm
Grip depth	40mm
Weight	11kg
Lifting capacity	150kg+lifting eye

Feature:

- * Design for moving concrete kerb stones, gutters and large paving slabs.
- * Removable handles.
- * Pin bolts to adjust the opening width.
- * Durable surface protection by galvanizing.
- * Useful tool for gardeners,pavers to do road construction, landscaping-design and transport.

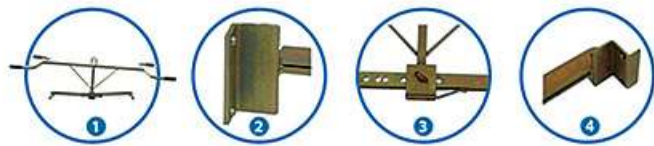



BRICK CUTTER SERIES



- * An universal grip for bricks, big stones and any heavy stuff.
- * It can be used with crane.
- * It can be equipped with rubber strips or harden piont screws for different stuff.

Model	H-1200
Clamp range	800-1200mm
Inside heighe	250mm
Max.lifting weight	2000kg
Grippers	1180mm
Application	Bricks,any kind of stones,heavy stuff
Color	RAL 1021 Yellow
Weight	156KG
Machine size	1200*1250*970mm

WOOD SPLITTER



Features:

- * 8" wood splitter
- * It is foldable
- * Save space
- * Easy to carry

Model	WS8
N.W.	6.2kg
G.W.	6.5kg
Product size	295*295*375mm
Package size	360*100*310mm
Package	carton box

Trailer Jack Stand

This trailer jack lifts up to one ton safely! The heavy duty steel construction on this jack lifts most trailers with ease. Features include bolt-on or weld-on mounting for your convenience, making this a high quality trailer jack for campers, equestrian trailers and other heavy hauls!

Item No.: TCZJ300
Lifting Load Capacity (Max.): 2000lbs
Travel: 300mm
Min. Height: 350mm
Max. Lifting Height: 650mm
Net Weight: 3kg
Finish: Galvanizing or Powder coating

Item No.: TCZJ400
Lifting Load Capacity (Max.): 2000lbs
Travel: 400mm
Min. Height: 450mm
Max. Lifting Height: 850mm
Net Weight: 3.8kg
Finish: Galvanizing or Powder coating

